

## AW45 Intelligent Circuit Breaker

### 1. Application



AW45-2000

AW45 series intelligent circuit breaker (hereinafter referred to as breaker) is suitable for the circuit of AC 50Hz with rated voltage 400V, 690V and rated current up to 6300A .It is mainly used to distribute electric energy and protect circuit and power supply equipment from overload, under-voltage short-circuit ,and single-phase earthing .With intelligent and selective protection functions, the breaker can improve the reliability of power supply, and avoid unnecessary power failure . The breaker is applicable for power stations, factories , mines(for 690V) and modern high-building, especially for the distribution system of intelligent building.

The breaker conforms to IEC60947-2. The whole series have past CCC certification and CE certification.

### 2. Environment conditions for operation

Temperature condition:  $-5^{\circ}\text{C} \sim +40^{\circ}\text{C}$ ; the average value within 24h not exceed  $+35^{\circ}\text{C}$  .

Elevation: altitude of installation place shall not exceed 2000m.

Atmosphere condition: relative humidity at  $+40^{\circ}\text{C}$  shall not exceed 50%. Higher humidity is permissible at lower temperature condition. When the higher monthly average relative humidity is 90% in the humidest month , the lowest monthly average temperature of this month is  $+25^{\circ}\text{C}$  . And consider the influence of dew on product surface due to temperature changes.

Pollution grade: gradeIII.

The breaker should be installed according to the requirement on the instruction manual: the vertical inclination degree shall not exceed  $5^{\circ}$  .



AW45-3200

### 3. Specification

Type		AW45-2000	AW45-3200	AW45-4000	AW45-6300
Frame rated current $I_{nm}$ (A)		2000	3200	4000	6300
Number of poles		3,4	3,4	3,4	3,4
Rated current $I_n$ (A)		630,800,1000,1250,1600,2000	2000,2500,3200	2000,2500,3200,4000	4000,5000,6300
Icu (kA)	400V	80	100	100	120
	690V	50	65	65	80
Ics = Icw (kA)	400V	50	80	80	100
	690V	40	50	50	65
Rated current at N-pole $I_n$ (A)		50% $I_n$ , 100% $I_n$			
Inherent making & breaking time		23-32ms			
Operational performance (operations)	Electric life	500			
	Mechanical life	Maintenance-free2500 Maintenance 10000			
Mounting mode		Fixed withdrawable			
Arcing distance(mm)		0			
Intelligent controller		Standard type(M) telecommunication type (H)			



AW45-6300

## 4. Intelligent controller

Intelligent controller is one of the core components of the circuit breaker

### 4.1 properties of the intelligent controller

- a. Protective function of over-load long time-delay and inverse time limit, short time-delay and inverse time limit, short time-delay definite time limit instantaneous operation protection;
- b. Single-phase earthing failure protection;
- c. Display of setting current  $I_r$  and operational current;
- d. Ampere meter;
- e. Over-load alarm;
- f. Short-circuit alarm
- g. Testing of operational properties

Note: The breakers with telecommunication port are available to realize remote control to breaker through master computer.

### 4.2 Protection performances of over-current release

- a.  $I_r$  and its inaccuracy of the controller

$I_{nm}(A)$	Long time-delay		Short time-delay		Instantaneous		Earthing failure	
	$I_{r1}$	Error	$I_{r2}$	Error	$I_{r3}$	Error	$I_{r4}$	Error
$\geq 2000$	$(0.4\sim 1)I_n$	$\pm 10\%$	$(0.4\sim 15)I_n$	$\pm 10\%$	$1.0I_n\sim 15kA$	$\pm 15\%$	$I_{nm} \leq 4000A(0.2-0.8) I_n$ (Max.1200A.Min.200A)	$\pm 10\%$
							$I_{nm} \leq 6300A(0.2-1.0) I_n$	

- Note:** 1. When the breaker could realize over-load with long time delay ,short-circuit with short time-delay and short-circuit instantaneous protections, the setting ratings can not be over-lapped ,and  $I_{r1} < I_{r2} < I_{r3}$
2. When the frame is 3200A and above ,the setting ratings range from  $1.01I_n$  to 75kA.

- b. Characteristics of long time-delay protection

1.05 $I_{r1}$	1.3 $I_{r1}$	1.5 $I_r$	2.0 $I_{r1}$
>2h non-tripping	<1h tripping	15s,30s,60s,120s,240s,480s	8.4s,16.9s,33.7s,67.5s,135s,270s

- c. Characteristics of short time-delay protection.

For low over-current ,inverse time-limit protection could be realized; when the over-current is  $>8 I_{r1}$ , it will automatically change to be definite time-limit protection properties.

Refer to table below for time-limit properties.

Setting delay time $t_s$ (s)	Returnable time (s)
0.1, 0.2, 0.3, 0.4	0.06, 0.14, 0.23, 0.35

## 5. Standard composition

To facilitate your ordering and utilization, the AW45 intelligent with basic electric accessories as follows.

Standard composition of the breaker	Fixed version	Withdrawable version
Body	<input type="checkbox"/>	<input type="checkbox"/>
Drawer base	<input type="checkbox"/>	<input type="checkbox"/>
Intelligent controller	<input type="checkbox"/>	<input type="checkbox"/>
Electric motor	<input type="checkbox"/>	<input type="checkbox"/>
Closing electro-magnet	<input type="checkbox"/>	<input type="checkbox"/>
Shunt release	<input type="checkbox"/>	<input type="checkbox"/>
Under-voltage	<input type="checkbox"/>	<input type="checkbox"/>
Auxiliary contact	<input type="checkbox"/>	<input type="checkbox"/>
Door frame	<input type="checkbox"/>	<input type="checkbox"/>

## 6. Accessories

### 6.1 Shunt release

- a. Shunt release is for remote breaking of circuit breaker so as to enhance security of the operator;
- b. Ratings of shunt release

Rated operational voltage (V)	AC220V	AC380V	DC110V	DC220V
Operational voltage range	(70%~110%) Ue			
Power consumption	24VA	24VA		40W

### 6.2 Under-voltage release

- a. It is an optional accessory;
- b. Mainly used to protection apparatus from damage due to lowering of the operational voltage to a certain value;
- c. Two types of release are available: instantaneous release and time-delay release;
- d. For breakers appended with the release, it should be electrified continuously;
- e. Ratings of under-voltage release.
- f. Operation properties of under-voltage release

Rated operational voltage (V)	AC220V	AC380V	DC110V	DC220V
Operational voltage range	(35%~110%) Us			
Power consumption	24VA	24VA		40W

Category		Under-voltage time-delay release	Under-voltage instantaneous release
Operation time of the release		Time-delay: 1s,3s,5s	Instantaneous
Operational voltage of the release	35% Us ~70% Us	Break the breaker	Break the breaker
	≤ 35% Us	Can not make the breaker	Can not make the breaker
	≥ 85% Us~110% Us	Reliably make the breaker	Reliably make the breaker
Within 1/2 delay time, voltage of power supply recovers to 85% Us		Can not break the breaker	

Note: Error the time of time-delay is ±10%

### 6.3 Closing electro-magnet

- a. The magnet is for remote making of circuit breaker so as to enhance security of the operator.
- b. The magnet could not be electrified for a long time.
- c. Ratings of the magnet.


Rated operational voltage (V)	AC220V	AC380V	DC110V	DC220V
Operational voltage range	(85%~110%) Us			
Power consumption	40VA	40VA		40W

### 6.4 Auxiliary contact


- a. Conventional heating current of auxiliary contact: 6A
- b. Auxiliary contacts: 4NO+4NC, 3NO+NC, 5NO+5NC(customization)

## 7. Outline and Installation Dimensions


### DW45-2000 Drawer-type

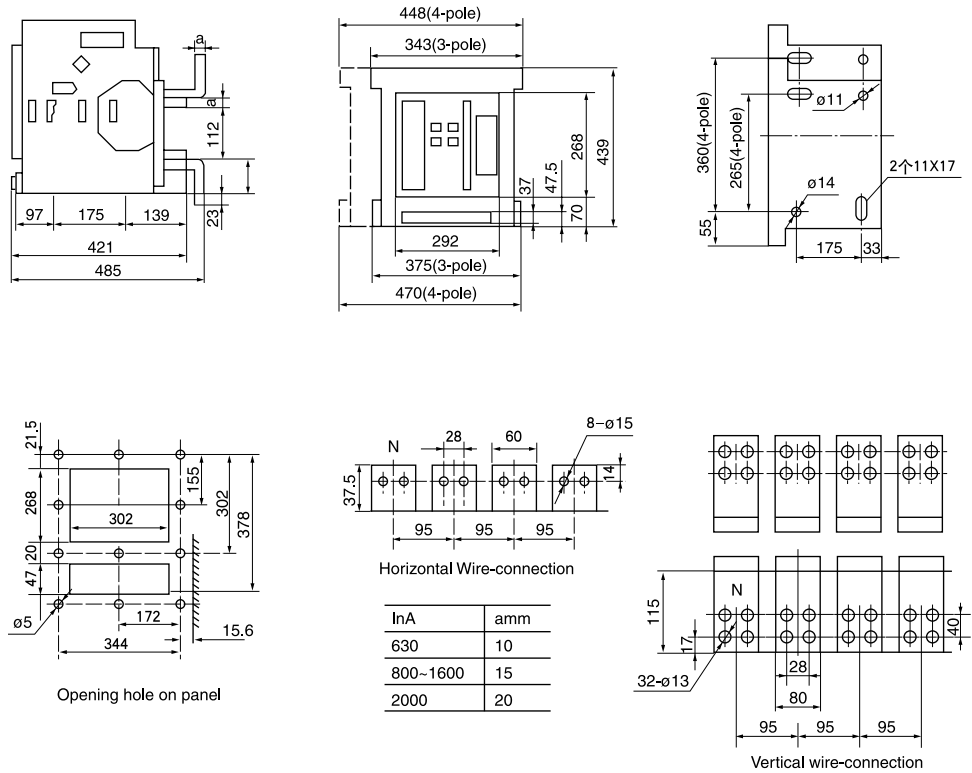


### AW45-2000 Fixed type

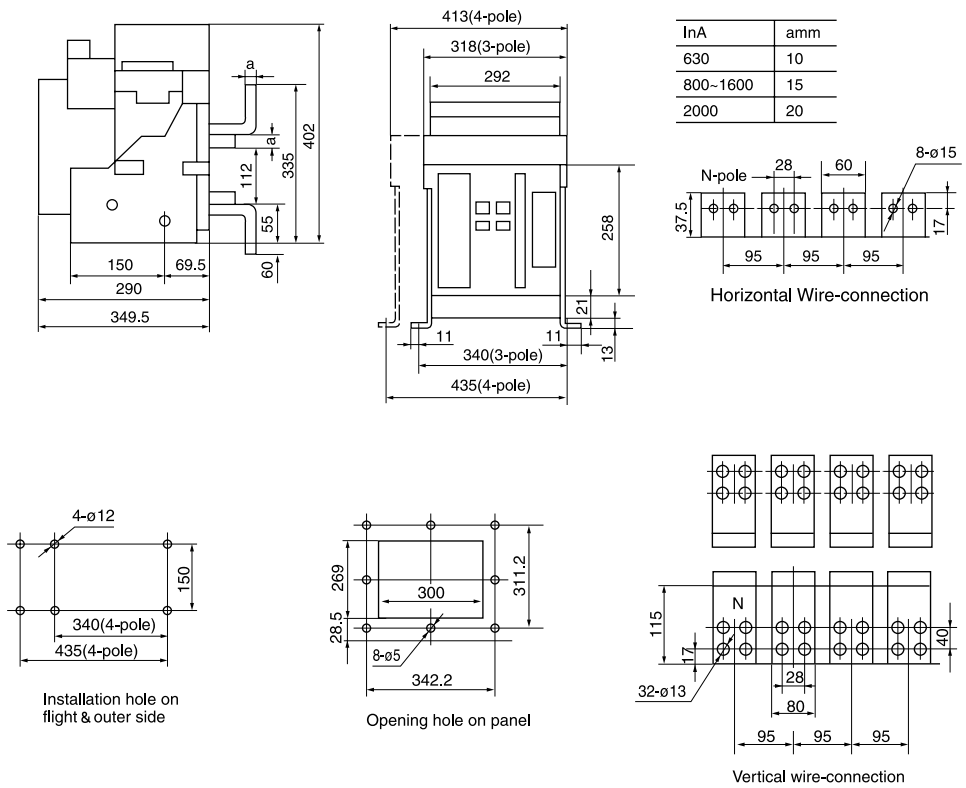


## AW45-3200 Drawer type

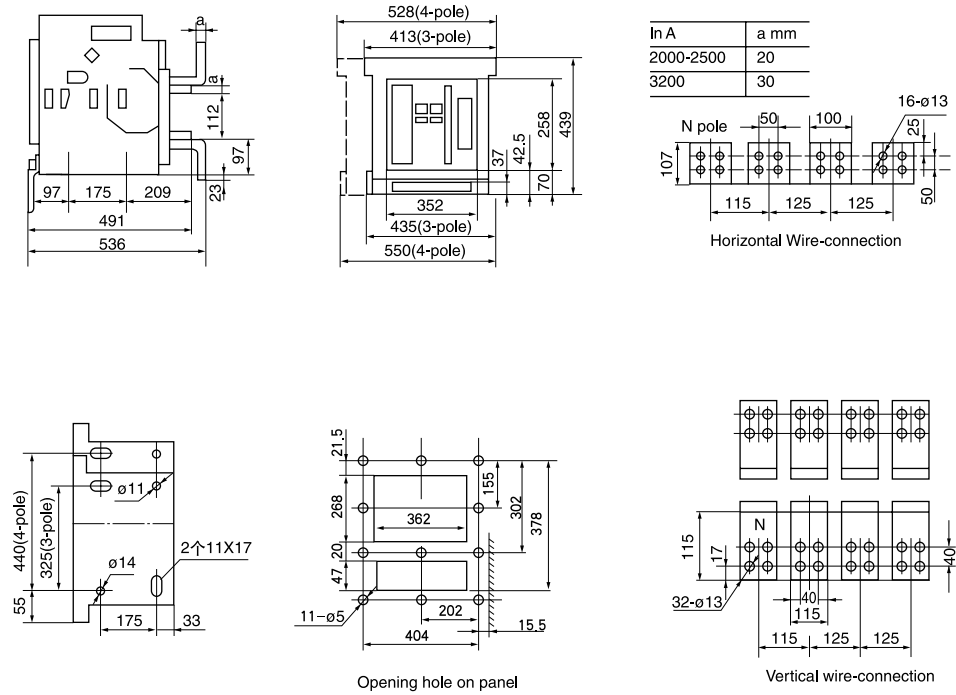


## AW45-4000 Drawer type (3-pole)

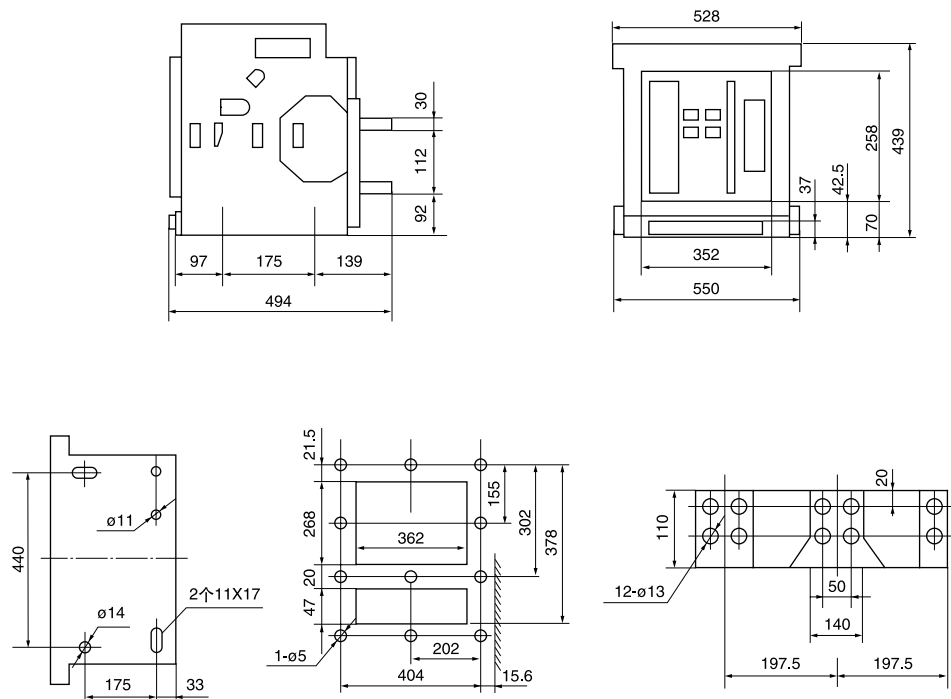


## AW45-4000,5000 Drawer-type

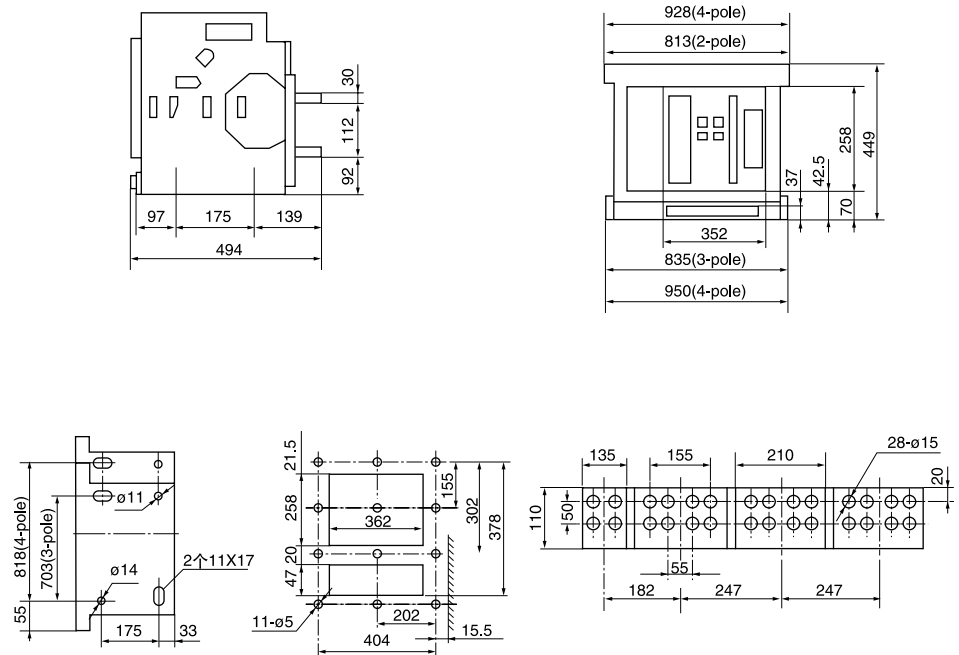

## AW45-6300 Drawer type (3-pole)

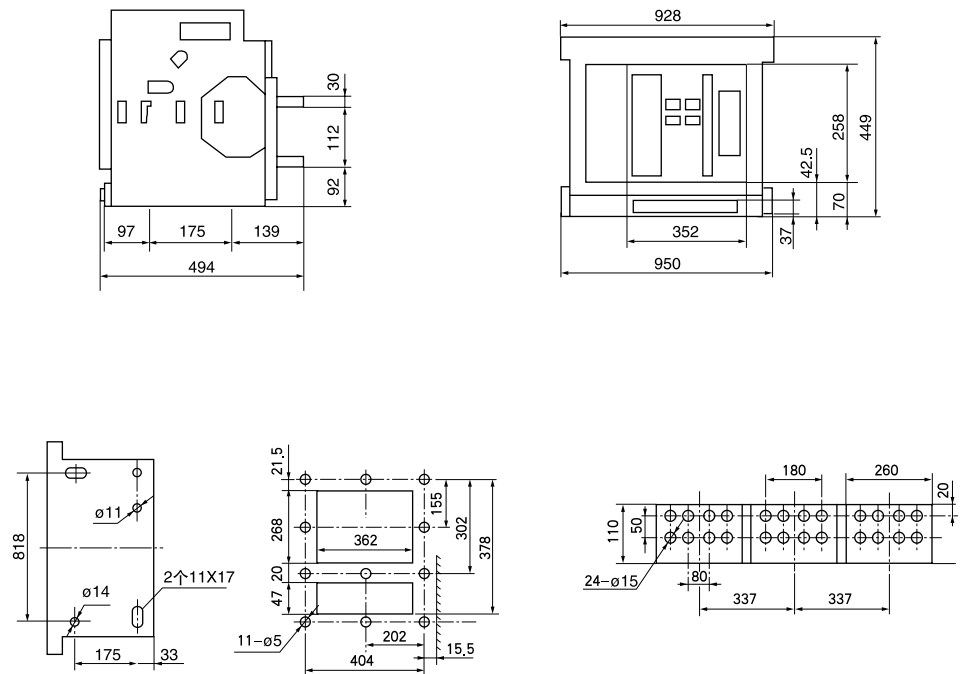

## Fixed type structure explosion

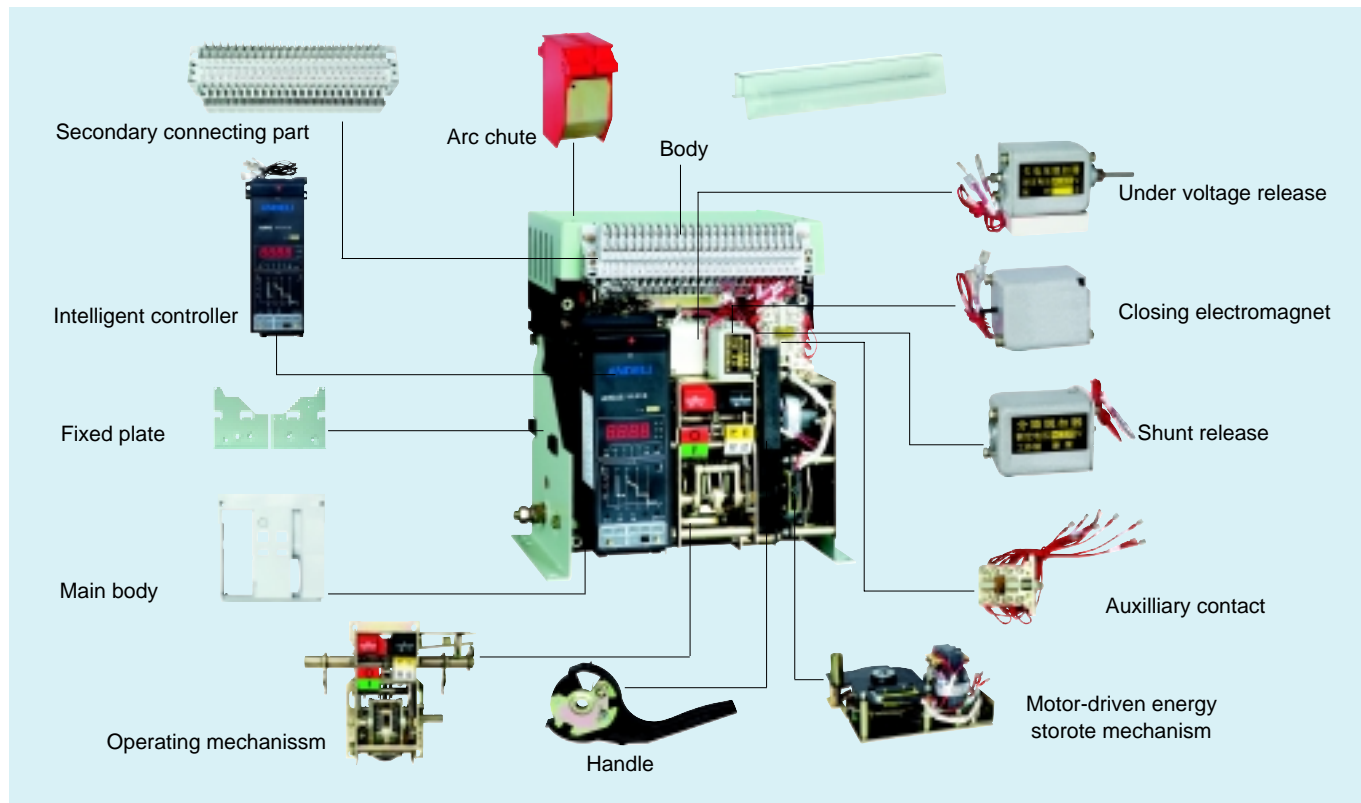

## Drawer type structure explosion

